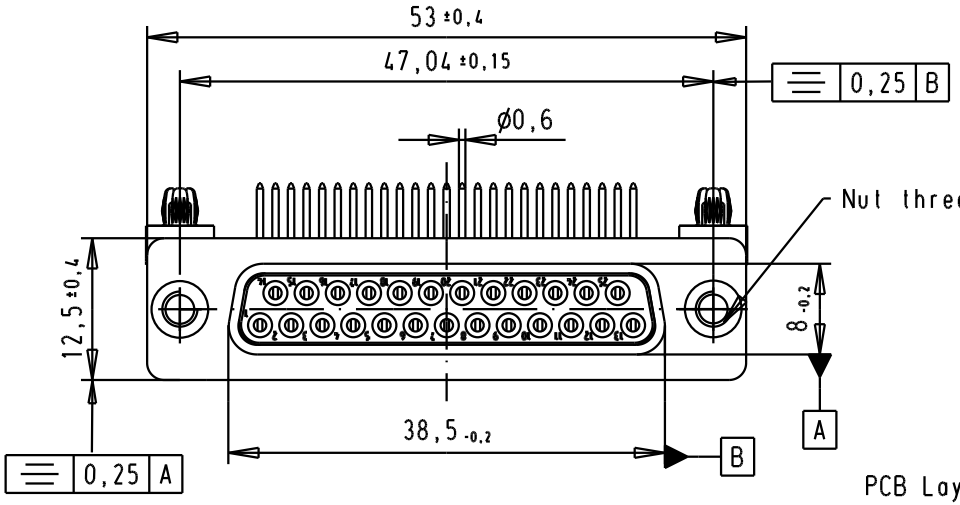

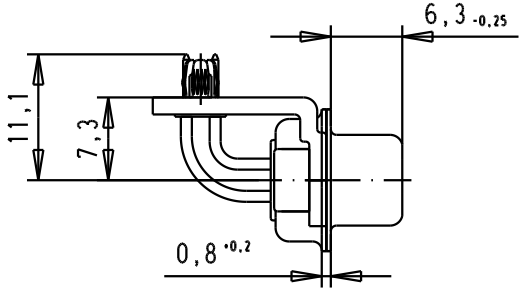

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf ±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

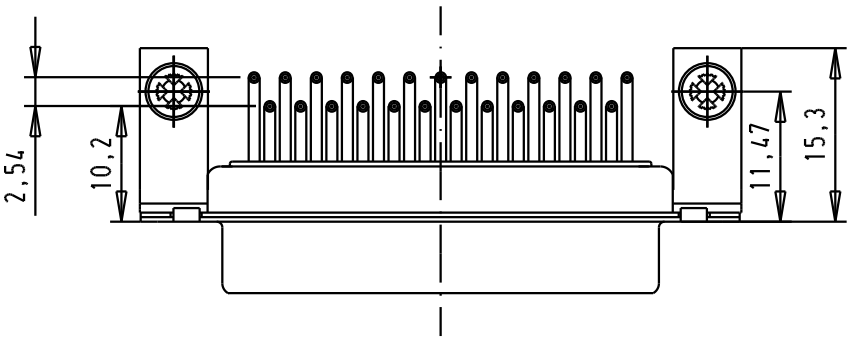

PCB Layout, Component side, thickness 1,6 mm

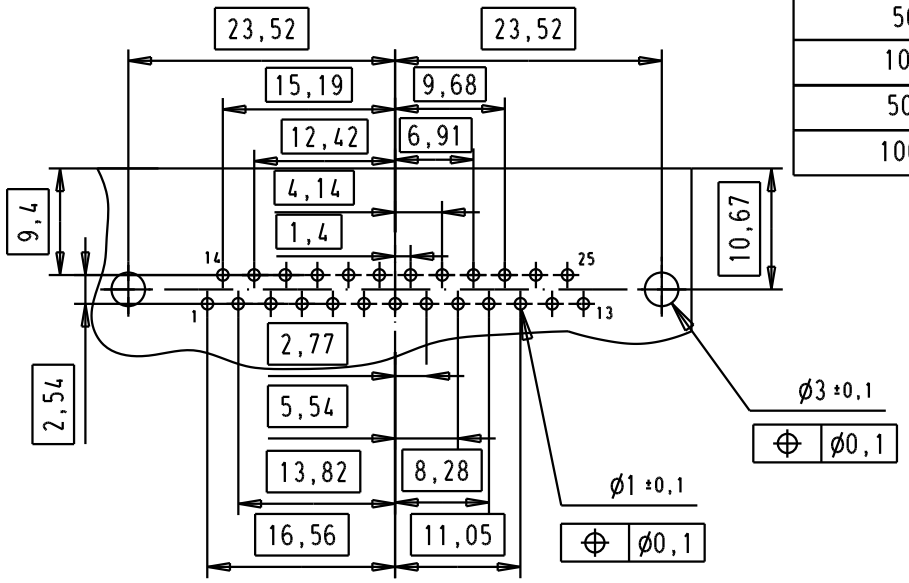

				Dat.	Name			
			Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 25 Poles, turned solder pins, tin plated shell with brackets, board-locks and clinch nuts	Maßstab/ Scale 1.5:1
			Insp.					
33416	19/01/06	JMDR	Stand.					
32137	16/08/04	TR	HARTING EURL F-95972 Paris				TB 0964314722x	Blatt/ Page 1/4
31058	8-JUL-02	CV					Sub.	
Mod.	Dat.	Name						

Part number	Nut thread
09643147223	M3
09643147222	UNC 4-40