

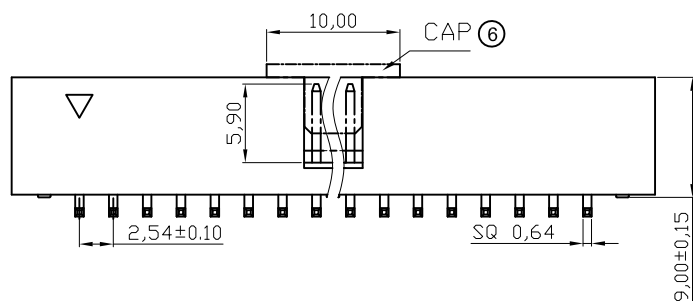


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

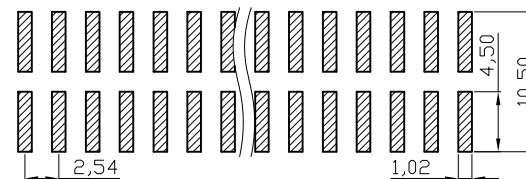

NOTES:

MATERIAL

- 1. Insulator Material: PA6T+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Gold flash

ELECTRICAL

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/minute
- 3. Contact Resistance : 20mΩ max
- 4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing: Tube+Cap
- ⑤ 3. Soldering temperature: +260°C(10s)

Order Information

Contacts xx: 06,08,10,12,14,16,18,20,24
26,30,34,50,60,64

RoHS compliant



Scale	Free	⑧	Update the correct part number	11.02.2014	Amy		Date	Name	Customer-No.	
TOLERANCE		⑦	Add UL-File No	12.12.2013	Winnie	Drawn	25.01.2006	Alex	ASSMANN WSW-No. ⑧ AWHW xxG-SMD	
X.X	±0.40	⑥	Modification the cap	07.11.2012	Amy	Approved	11.02.2014	Amy		
X.XX	±0.25	⑤	add soldering temperature	09.12.2011	Lucas				Drawing-No.	
X.XXX	±0.15	④	Corrected insulator material	29.10.2009	Dean				ASS 2316 CO	rev08
Angle	±3°	③	Update	30.06.2009	Dean				Replace	Sheet
		Id.	Modification	Date	Name					



ASS 2316 CO

rev08

Replace

Sheet