


**Material:**



- Conductor: 26AWG  $7 \times 0.16 \pm 0.015$ mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2
- Cable tie: White
- Cable jacket color: Black, White, Blue, or Grey
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures:  $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8



Unit: mm

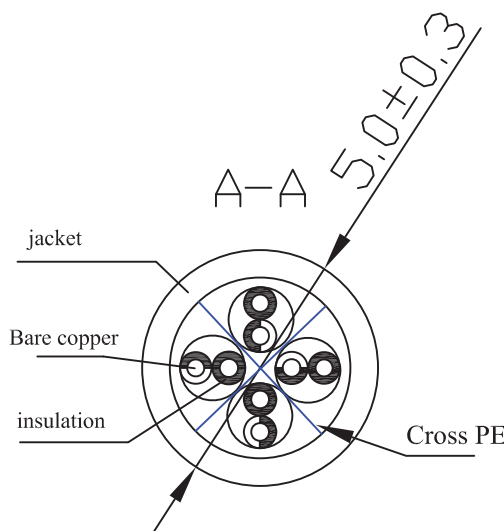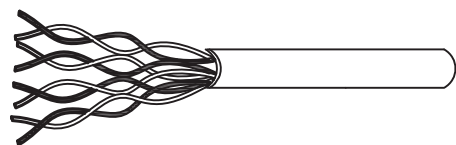

**Order Code: DK-1611-26-xxx/x**  
 Order lengths in feet: 1,3,5,7,10,15, 20,25,50,100  
 Cable Jacket colors: Black(BL), White(WH), Blue(B), Green(GR), or Grey(G)

Scale	Free					Date	Name
<b>TOLERANCE</b>							
X.	±0.3					Drawn	23.04.13 Wilson
X.X	±X					Approved	23.04.13 Groll
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°	ⓐ	Drawn	23.04.13	Wilson		
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us	

Title
<b>Cat6 UTP Patch cable</b> Unshielded/Booted, 26AWG, gold plating
ASSMANN WSWW-No. <b>DK-1611-26-xxx/x</b>
Drawing-No.
rev00
Replace
Sheet 1/1