




SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

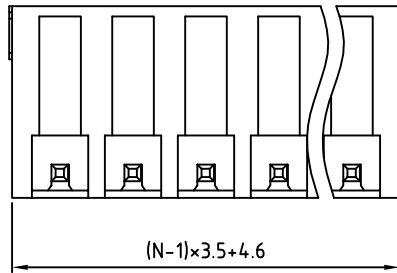

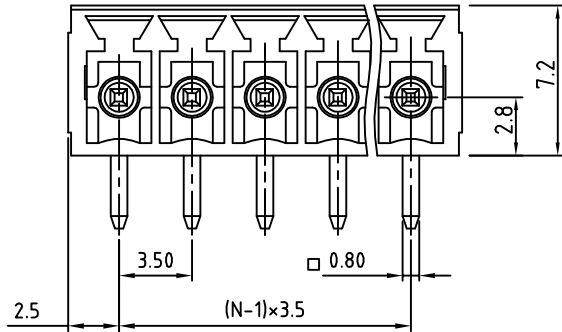


N= number of poles

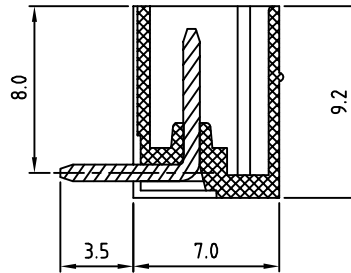

Material:

- Contact pin: Brass(CuZn) Tin plated
- Insulator(housing): Thermoplastic (UL94V-0)

Electrical: cULus /CSA /VDE

- Voltage rating: 300V/125V/125V
- Current rating: 10A/8A/10.5A
- Withstanding Voltage: 1.6 KV/1.6KV/2.5KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:   


RoHS Compliant

PART NUMBER:

OSTOQXX1251

No. of Poles  
02: 2 Poles  
:  
:  
24: 24 Poles

COLOR  
0: Black  
5: Green (Standard)  
6: Blue  
8: Grey

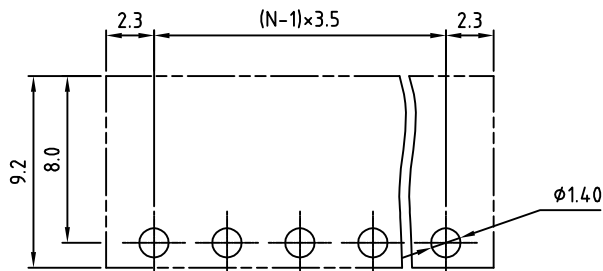

RECOMMENDED PCB LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTOQ 3.5mm Series 90° (2P-24P) Triangle Key Lock				
PART NO.	OSTOQXX1251	DWG NO.		OSTOQXX1251.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Tony 2007.01.11	Tony 2007.01.11		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					REV: G	X.XX ±0.10
				SHEET: 01/01		X° ±1°