


SEE CHARTS FOR "A" DIMENSION


(THE "A" DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

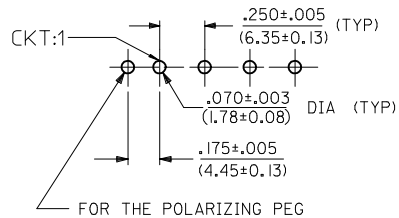

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

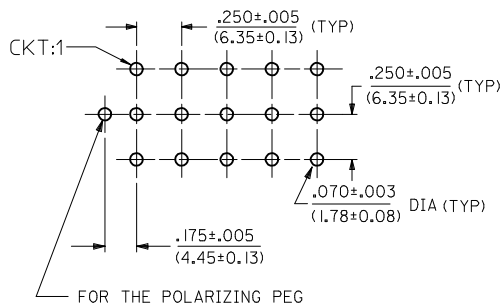

NOTES:

- 1) MATERIAL CODES:
 - *A= UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
 - *C= NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
 - *D= NYLON, V-2. COLOUR: BLACK (ZYTEL 101F)
 - *E= PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE
- 2) PLATING CODES:
 - *A = TIN 140 m.(13.50 MICRONS) TO 240 m.(6.00 MICRONS)
- 3) TERMINAL LENGTH CODES:
 - I= TERMINAL FOR .062/(1.57) THICK PC BOARD
- 4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.
- 5) HEADER ASSEMBLY HOUSINGS MATE WITH :
 - PLUG HOUSINGS, .084/(2.13) DIA. SERIES: (4202I-**))
- 6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.
- 7) REFER PACKAGING SPECIFICATION
 - PK-43255-001 FOR 2,3 & 4 CIRCUIT.
 - PK-43255-003 FOR 6,9,12 & 15 CIRCUIT.
 - PK-36518-292 FOR PART# 367660001,367660002 & 367660003.

RoHS COMPLIANT

NOTES UPDATED EC NO: I2015-0013 DFWN: HTHYAGARAJ 2014/07/22 CHKD: CHIKD APPR: KPRASAD 2014/08/21 REV: E3	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
	4 PLACES ± --- ± --- 3 PLACES ± --- ± 0.005 2 PLACES ± 0.13 ± 0.01 1 PLACE ± 0.25 ± --- ANGULAR ± 1/2°		mm INCH DRAWN BY SUDHIR DATE 2004/06/08 CHECKED BY GJLOWE DATE 2004/06/08 APPROVED BY GJLOWE DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(2.13) SERIES COMPLIANT-POLARIZING PEG	MOLEX INCORPORATED		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-43255-00**	SHEET NO. 1 OF 2		
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

ITEM NO.	CIRCUIT SIZE	MATERIAL COLOR (SEE NOTE 1)	PIN (1) OR SOCKET (2) TERMINALS	TERMINAL PLATING (SEE NOTE 2)	TERMINAL LENGTH (SEE NOTE 3)	"A" DIM ±.015
43255-0003	2	A	2	A	1	.17/(4,3)
43255-0059		A	1	A	1	
43255-0113		C	1	A	1	
43255-0115		C	2	A	1	
36759-0021		D	1	A	1	
36759-0061		D	2	A	1	
36757-0021	E	1	A	1		
36757-0061	E	2	A	1		
43255-0011	3	A	2	A	1	.17/(4,3)
43255-0067		A	1	A	1	
43255-0121		C	1	A	1	
43255-0123		C	2	A	1	
36759-0022		D	1	A	1	
36759-0062		D	2	A	1	
36757-0022	E	1	A	1		
36757-0062	E	2	A	1		
43255-0019	4	A	2	A	1	.17/(4,3)
43255-0075		A	1	A	1	
43255-0129		C	1	A	1	
43255-0131		C	2	A	1	
36759-0023		D	1	A	1	
36759-0063		D	2	A	1	
36757-0023	E	1	A	1		
36757-0063	E	2	A	1		
43255-0027	6	A	2	A	1	.17/(4,3)
43255-0083		A	1	A	1	
43255-0137		C	1	A	1	
43255-0139		C	2	A	1	
36759-0024		D	1	A	1	
36759-0064		D	2	A	1	
36757-0024	E	1	A	1		
36757-0064	E	2	A	1		
43255-0035	9	A	2	A	1	.17/(4,3)
43255-0091		A	1	A	1	
43255-0145		C	1	A	1	
43255-0147		C	2	A	1	
36759-0025		D	1	A	1	
36759-0065		D	2	A	1	
36757-0025	E	1	A	1		
36757-0065	E	2	A	1		
43255-0043	12	A	2	A	1	.17/(4,3)
43255-0099		A	1	A	1	
43255-0153		C	1	A	1	
43255-0155		C	2	A	1	
36759-0026		D	1	A	1	
36759-0066		D	2	A	1	
36757-0026	E	1	A	1		
36757-0066	E	2	A	1		
43255-0051	15	A	2	A	1	.17/(4,3)
43255-0107		A	1	A	1	
43255-0161		C	1	A	1	
43255-0163		C	2	A	1	
36759-0027		D	1	A	1	
36759-0067		D	2	A	1	
36757-0027	E	1	A	1		
36757-0067	E	2	A	1		
36766-0001	2	C	1	A	1	.17/(4,3)
36766-0002	3	C	1	A	1	
36766-0003	4	C	1	A	1	

RoHS COMPLIANT

NOTES UPDATED EC NO: 12015-0013 DRWN: HTHYAGARAJ 2014/07/22 CHKD: [Signature] APPR: KPRASAD 2014/08/21 REV	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± .13</td> <td>± .005</td> </tr> <tr> <td>3 PLACES</td> <td>± .13</td> <td>± 0.01</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± .01</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± .01</td> </tr> </table>		mm	INCH	4 PLACES	± .13	± .005	3 PLACES	± .13	± 0.01	2 PLACES	± 0.25	± .01	1 PLACE	± 0.25	± .01	DIMENSION STYLE IN/MM	SCALE INCH	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	± .13	± .005																		
	3 PLACES	± .13	± 0.01																		
2 PLACES	± 0.25	± .01																			
1 PLACE	± 0.25	± .01																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	DRAWN BY SUDHIR	DATE 2004/06/08	CHECKED BY GJLOWE	DATE 2004/06/08	TITLE HEADER HOUSING ASSEMBLY .084/(2.13) SERIES COMPLIANT-POLARIZING PEG															
MATERIAL NO. SDA-43255-00**	DOCUMENT NO. SDA-43255-00**	APPROVED BY GJLOWE	DATE 2004/06/08		MOLEX INCORPORATED	SHEET NO. 2 OF 2															
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					